


TECHNICAL DATA

KS158T

Product Demonstration

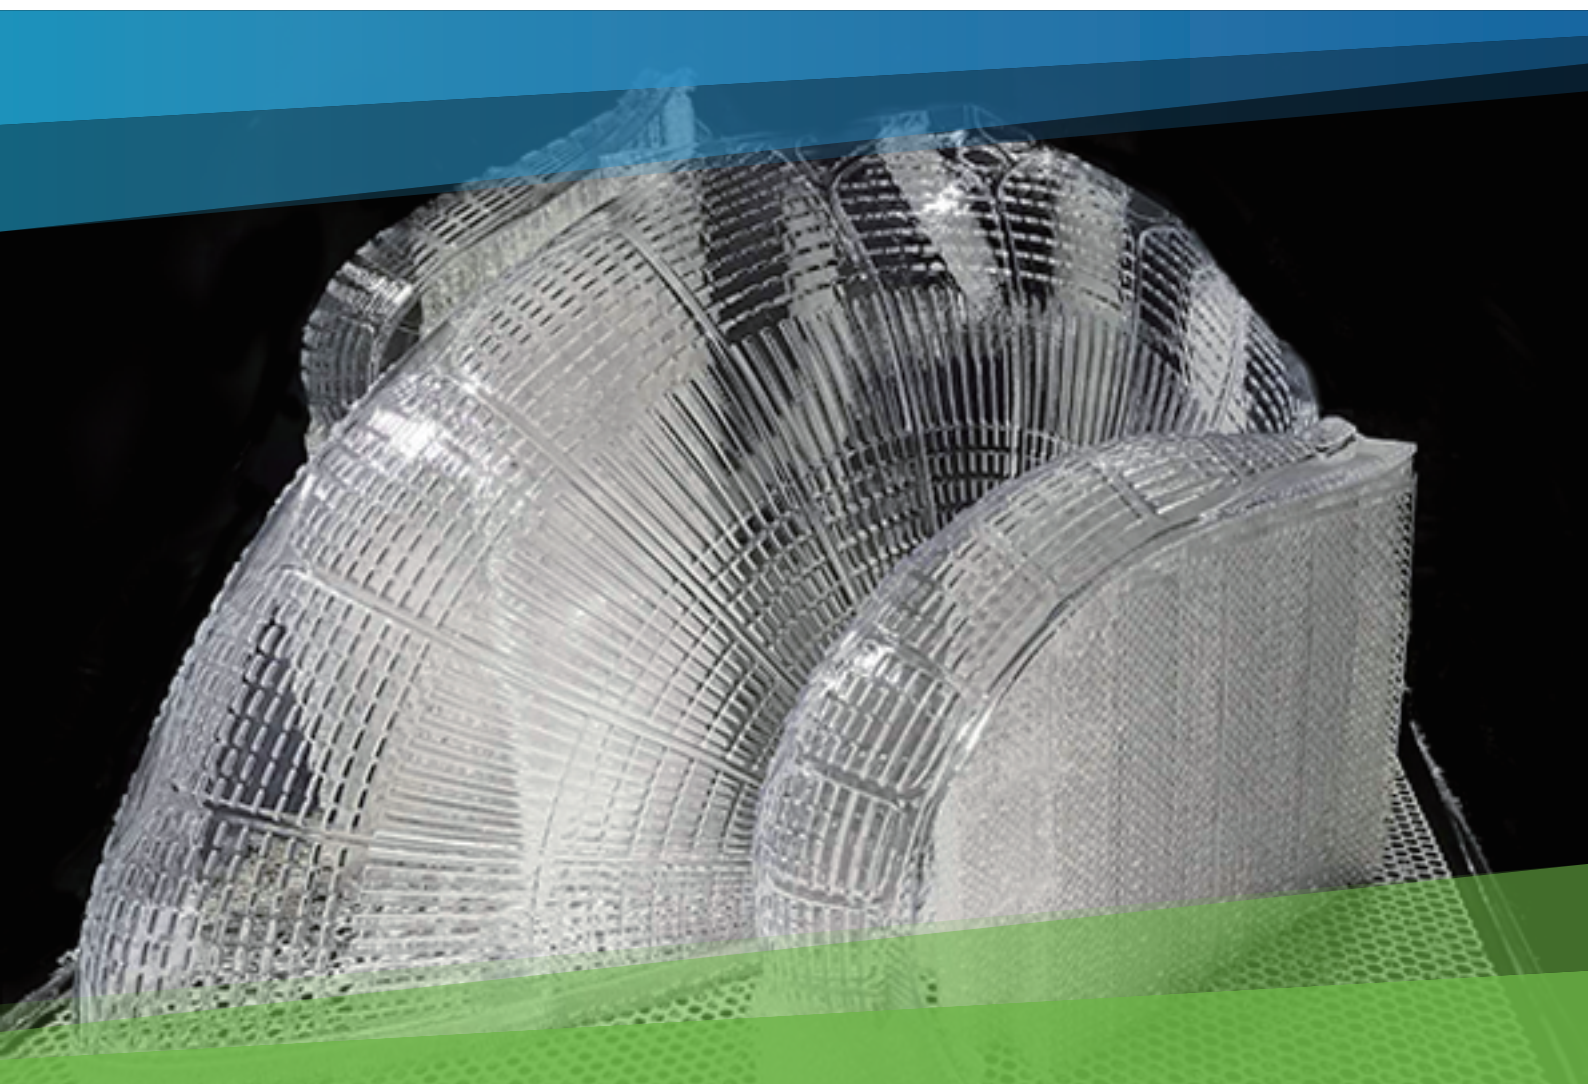

Shenzhen JS Additive Technology Co., Ltd.

Floor 14-15, Building 3-A, Yunzhi Science Park, Gongming Street,
Guangming District, Shenzhen | China 518107



Material Overview

KS158T is an optically transparent SLA resin for quickly producing clear, functional and accurate parts with acrylic appearance. It's fast to build and easy to use. The ideal application is transparent assemblies, bottles, tubes, automotive lenses, lighting components, fluid flow analysis and etc., and also tough functional prototypes.

Advantages

- Excellent transparency
- Excellent humidity and moisture resistance
- Fast to build and easy to finish
- Accurate and dimensionally stable

Ideal Applications

- Automotive lenses
- Bottles and tubes
- Tough functional prototypes
- Transparent display models
- Fluid flow analysis

Technical Datasheet

Liquid Properties		Optical Properties	
Appearance	Clear	Dp	0.135–0.155 mm
Viscosity	325–425 cps @ 28 °C	Ec	9–12 mJ/cm ²
Density	1.11–1.14g/cm ³ @ 25 °C	Building layer thickness	0.1–0.15mm

Mechanical Properties		UV Postcure
MEASUREMENT	TEST METHOD	VALUE
Hardness, Shore D	ASTM D 2240	72–78
Flexural modulus, Mpa	ASTM D 790	2,680–2,775
Flexural strength, Mpa	ASTM D 790	65– 75
Tensile modulus, MPa	ASTM D 638	2,170–2,385
Tensile strength, MPa	ASTM D 638	25–30
Elongation at break	ASTM D 638	12 –20%
Impact strength, notched Izod, J/m	ASTM D 256	58 – 70
Heat deflection temperature, °C	ASTM D 648 @66PSI	50–60
Glass transition, Tg, °C	DMA, E"peak	55–70
Density, g/cm ³		1.14–1.16

Recommended temperature for processing and storage of the above resin should be 18°C–25°C.

Web: www.jsadditive.com

Email: info@jsadditive.com

Follow us on    @jsadditive